




## OWP324T-25-6-ODP

**OIL WELL PUMP MOTOR**

**HIGH TORQUE / HIGH SLIP (5 - 8%)**

**OPEN DRIP PROOF**

**INVERTER DUTY 10:1 CONSTANT TORQUE - NEMA MG1 PART 31**

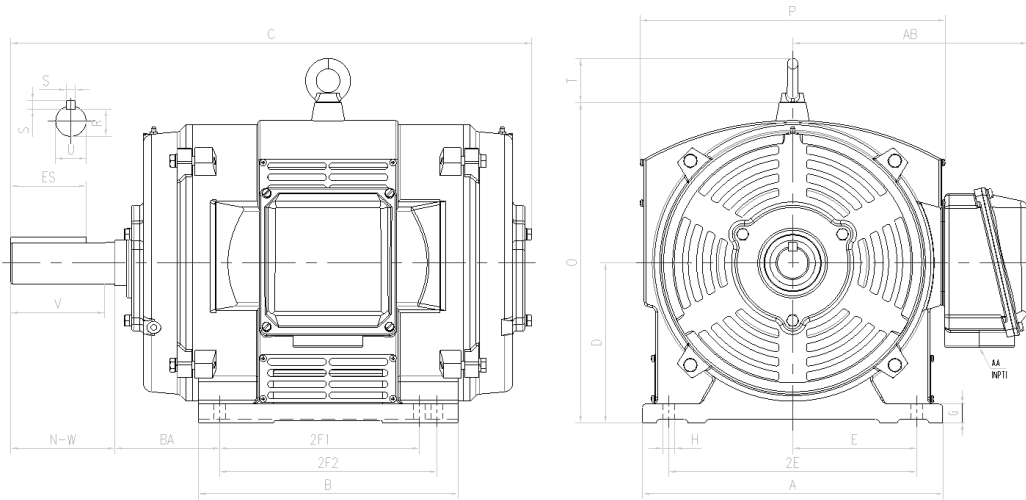

### DIMENSIONS

HP	RPM	Frame	MOUNTING														
			A	B	C	D	G	H	J	E	2E	2F1	2F2	O	P	T	BA
25	1200	324T	14.6	13.95	27.1	8	0.85	0.66	NA	6.25	12.5	10.5	12	16.1	15.35	2.6	5.25

Shaft Extension, Key Set						Conduit Box		Bearings		Mount
U	V	R	S	ES	N-W	AA	AB	DE	ODE	
2.125	5	1.845	0.5	3.91	5.25	2	11.4	6312	6312	F2

**BEARING LUBRICATION:** The bearings come lubricated with Mobil Polyrex EM Polyurea Grease. It is recommended that you add some additional lubrication when the motor is installed.

Three options (brands) for suitable lubrication include, but are not limited to, the following:

- 1.) Mobil Polyrex EM
- 2.) Citco Polyurea MP
- 3.) Conoco Phillips Polytac EP





## OWP324T-25-6-ODP

**OIL WELL PUMP MOTOR**

**HIGH TORQUE / HIGH SLIP (5 - 8%)**

**OPEN DRIP PROOF**

**INVERTER DUTY 10:1 CONSTANT TORQUE - NEMA MG1 PART 31**

### PERFORMANCE DATA

HP	RPM	Frame	Voltage	Frequency (Hz)	Full Load S.F.	Insulation Class	NEMA Design	Slip (%)	NEMA Code	Enclosure Type	IP Rating	Max. Ambient
25	1125	324T	230/460/796	60	1.15	F	D	6.3	G	ODP	23	40 °C

Amps (460V)		Efficiency (%)			Power Factor			Torque (ft-lb)			DE Bearing	ODE Bearing	Connection	Weight (lbs.)
FLA	LRA	100%	75%	50%	100%	75%	50%	FLT	LRT %	BDT %				
34	182	86.5	87.5	88.0	0.80	0.75	0.63	116.8	295	310	6312	6312	12 Lead 2Δ/Δ/Y	466

### NAME PLATE

TYPE		ODP	MODEL	OWP324T-25-6-ODP	S.F.	1.15						
HP	25	FRAME	324T	EFF	86.5							
RPM	1125	VOLTS	230/460/796	P.F.	0.80							
INS	F	AMPS	68/34/19.6	CODE	G							
PH	3	MAX AMB	40 °C	DE BRG	6312							
HZ	60	S/N		ODE BRG	6312							
WT/LBS	466	DESIGN	D	CONNECTION	12 Lead 2Δ/Δ/Y							
Thermo-protection 155°C (PT1,PT2)				LUB	Mobil Polyrex EM							
Designed Specifically for use on Oil Well Pumping Units												
Hernando, Mississippi								C 272709				

### APPLICATIONS:

Designed Specifically for use on Oil Well Pumping Units. Suitable for use on Variable Frequency Drives (VFDs).